

VUpoint



5MP PoE Dome AI Camera



P/N: RVCM32A330RA

Quick Guide



Dimensions



Installation

Ceiling Mounting

- 1 Apply the position sticker to the desired camera mounting position.



- 2 Remove the cover component by loosening three locking screws with the included hex wrench.




- 3 Use the position indicated on the position sticker to drill the holes needed to mount the camera base. Insert the expansion bolt into the holes.

- 4 Match the base's mount openings to the expansion bolts position, then place the mounting screws through the base's mount opening into the expansion bolt.

- 5 Tighten the mounting screws to ensure the camera base mounted securely.

- 6 Place the cover component back onto the base. Make sure the locking screw position on the cover component matches the locking post on the base.

- 7 Once the cover component is in the correct position, tighten the locking screws.

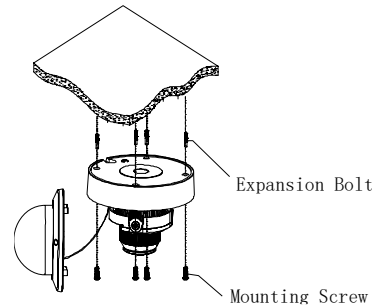

Camera Setup Options

You can setup the camera using either of the following methods:

- 1 Add Camera to RISCO Cloud first, then configure
- 2 Configure NVR first, then add to RISCO Cloud

1 Add Camera to RISCO Cloud first, then configure

Step 1

 Install SD Card in Camera and connect to router.


Step 2

 Open your browser and go to: www.riscocloud.com/ic

 Login with Installer Admin credentials

 Add a Site or select an existing Site > Click **Video** tab >

[+ Add Video Device](#)

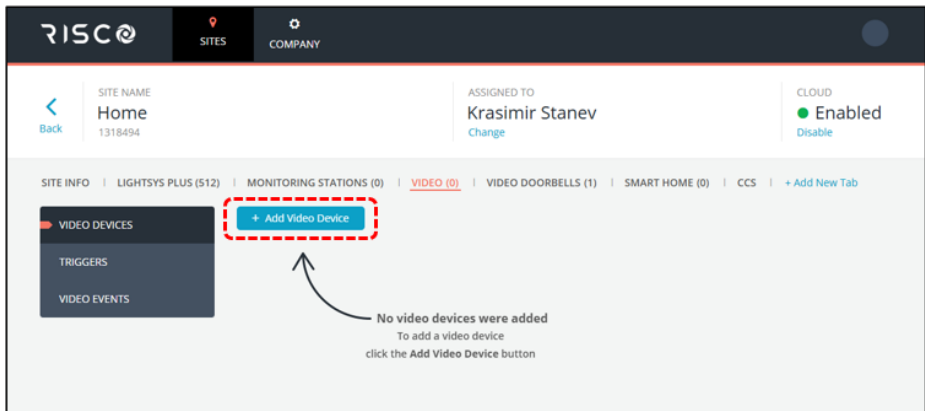


Step 3

 Set Camera info:

- ✓ Enter a **Device Name**
- ✓ Select **IP Camera** Video Device
- ✓ Select **VUpoint AI** Type
- ✓ Enter the Device **Serial Number** (printed on the box and on the device)

Click  when done.

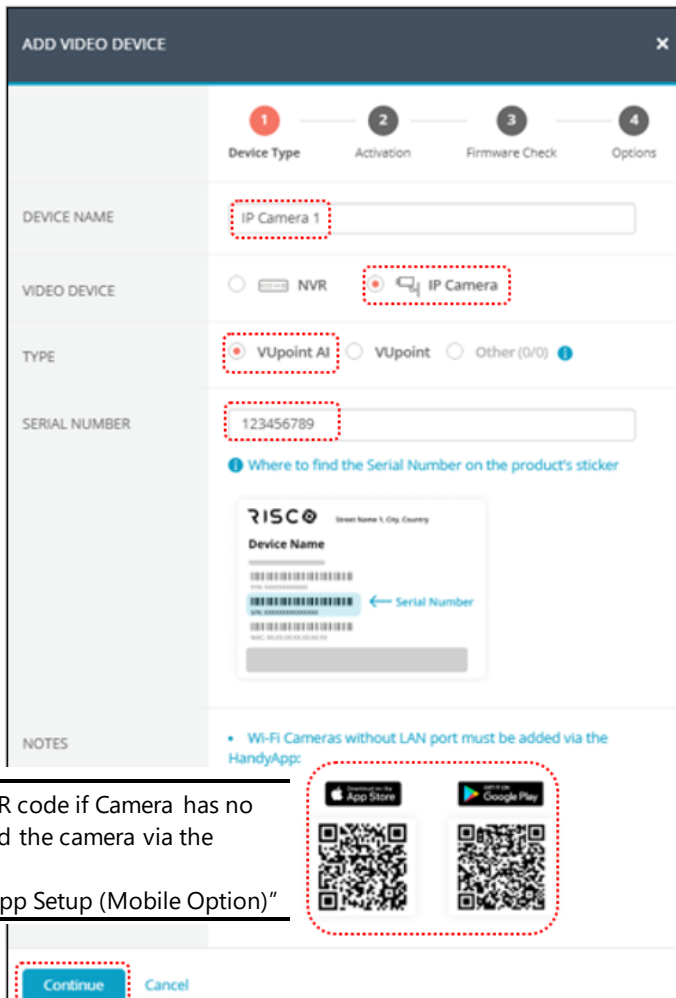

ADD VIDEO DEVICE

1 Device Type 2 Activation 3 Firmware Check 4 Options

DEVICE NAME: IP Camera 1

VIDEO DEVICE: ☐ NVR ☒ IP Camera

TYPE: ☒ VUpoint AI ☐ VUpoint ☐ Other (0/0) ⓘ

SERIAL NUMBER: 123456789

ⓘ Where to find the Serial Number on the product's sticker

RISCO
Street Name 1, City, Country

Device Name

Serial Number

NOTES

- Wi-Fi Cameras without LAN port must be added via the HandyApp:

Continue Cancel

Note: Scan QR code if Camera has no LAN port - add the camera via the HandyApp (see "HandyApp Setup (Mobile Option)"

Step 4

ID Define Admin Password and then click [Continue](#)

Note: If the IP Camera is already activated, this step may be skipped

ADD VIDEO DEVICE

<

1
Device Type

2
Activation

3
Firmware Check

4
Options

SETUP
ADMIN PASSWORD

Enter Admin Password

Confirm Admin Password

- The length must be 8 ~ 16 characters
- The password cannot be the same as the user name
- Only uppercase letters, lowercase letters, digits, special characters are allowed. Must contain 2 of them
- Special characters include *~@#5%^&*O_-=+\\{!:", <->/?

Continue

Cancel

Step 5

↑ If prompted, click **Upgrade Firmware** to **upgrade firmware** for the latest features.

Note: If the firmware is already upgraded, this step may be skipped.



Step 6

⚙ The IP Camera is added to the Site. Click **Remote Configuration** to begin configuration.

RISCO

SITESCOMPANY

Back

SITE NAME

Test

78731

ASSIGNED TO

Krasimir Stanev

Change

CLOUD

Enabled

Disable

SITE INFO

PANEL (0)

MONITORING STATIONS (0)

VIDEO (1)

VIDEO DOORBELLS (0)

SMART HOME (0)

+ Add New Tab

VIDEO DEVICES

TRIGGERS

VIDEO EVENTS

+ Add Video Device

1 Video Devices found

T	NAME	TYPE	MODEL	CONNECTION	SN/MAC	VERSION	ACTIONS
●	IP Camera 1	VUpoint AI	IP CAMERA	Wired	GL082500000000...	VC31 35.1.2	Remote Configuration

HandyApp Setup (for future use)

Alternatively, you can use the HandyApp to add the IP Camera to the RISCO Cloud.

Step 1

 Download **HandyApp** from App Store/Google Play


 Scan QR code in the app



Step 2

Add IP Camera to RISCO Cloud via HandyApp

Select as indicated below

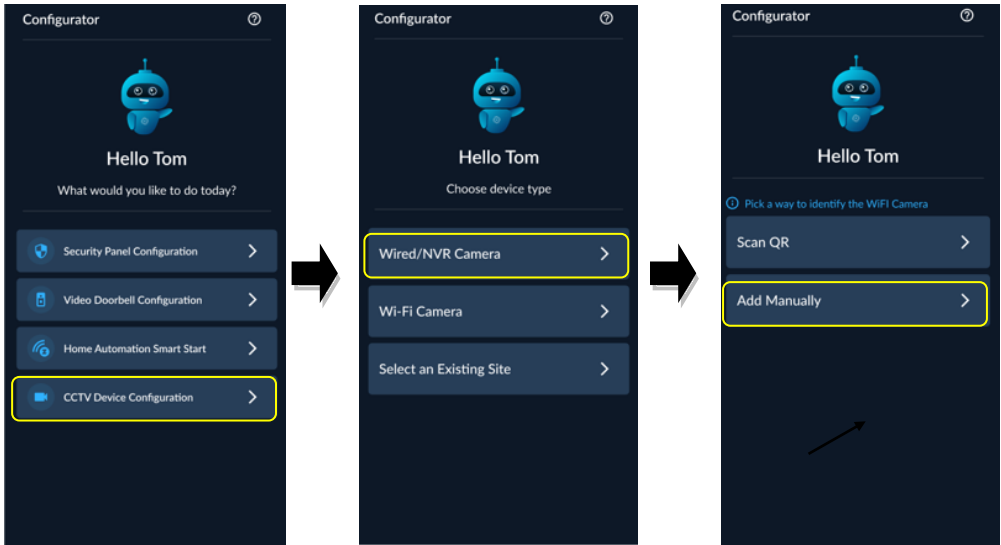

 Follow on-screen prompts. The camera is now ready to operate via the cloud.

2 Configure NVR first, then add to RISCO Cloud

Step 1

🖥️ Install hard drive in NVR and connect to router.

Step 2

🔍 Install **RISCO Search Tool** to locate the camera's IP Address and then click **Modify**.

RISCO

?

—

×

Search

Upgrade

Config

Stream Config

OSD Config

Recovery

Initialization

Import/Export

Reboot

Change Password

Filteration

IP

▼

☐	No.	IP	Media Port	Web Port	Channel	Device Name	Device Type	Device Version	Net Mask	Gateway
☐	1	10.0.0.192	0	80	2	IP CAMERA	IP CAMERA	VC47.55.1.1.2-250...	255.255.255.0	10.0.0.1
☒	2	10.0.0.104	9000	80	1	IP Camera	IP Camera	V43.45.8.2.4.1_24...	255.255.255.000	010.000.000.001
☐	3	10.0.0.195	0	80	1	IP CAMERA	IP CAMERA	VC31.35.1.2.0-250...	255.255.255.0	10.0.0.1
☐	4	10.0.0.196	0	80	1	IP CAMERA	IP CAMERA	VC31.35.1.2.0-250...	255.255.255.0	10.0.0.1
☐	5	10.0.0.197	0	80	1	IP CAMERA	IP CAMERA	VC31.35.1.2.0-250...	255.255.255.0	10.0.0.1
☐	6	10.0.0.198	0	80	1	RPW2A	RPW2A	VC39.24.1.1.4-250...	255.255.255.0	10.0.0.1
☐	7	10.0.0.199	9000	80	1	IPCamera	IPCamera	V40.45.8.2.4.1_24...	255.255.255.000	010.000.000.001
☐	8	10.0.0.110	0	80	1	RPW1B	RPW1B	VC39.24.1.1.4-250...	255.255.255.0	10.0.0.1
☐	9	10.0.0.112	0	80	1	RPW3A	RPW3A	VC39.24.1.1.4-250...	255.255.255.0	10.0.0.1
☐	10	10.0.0.181	0	80	32	VUpoint 32 Channel AJ	N2032	VC1.2.0-250612	255.255.255.000	010.000.000.001
☐	11	10.0.0.227	0	80	1	IP Camera	IP Camera	VC54.24.1.2.2-250...	255.255.255.0	10.0.0.1
☐	12	10.0.0.241	0	80	4	RVNVR044K1RA	RVNVR044K1RA	VC1.2.0-250514	255.255.255.000	010.000.000.001

User Info

Device Info

UserName

admin

IP

10.0.0.104

Media Port

9000

Web Port

80

Password

Gateway

010.000.000.001

Net Mask

255.255.255.000

Net Mode


Static

▼

Modify

Step 3


Enter the Camera IP address in the browser > Set Admin Password > 

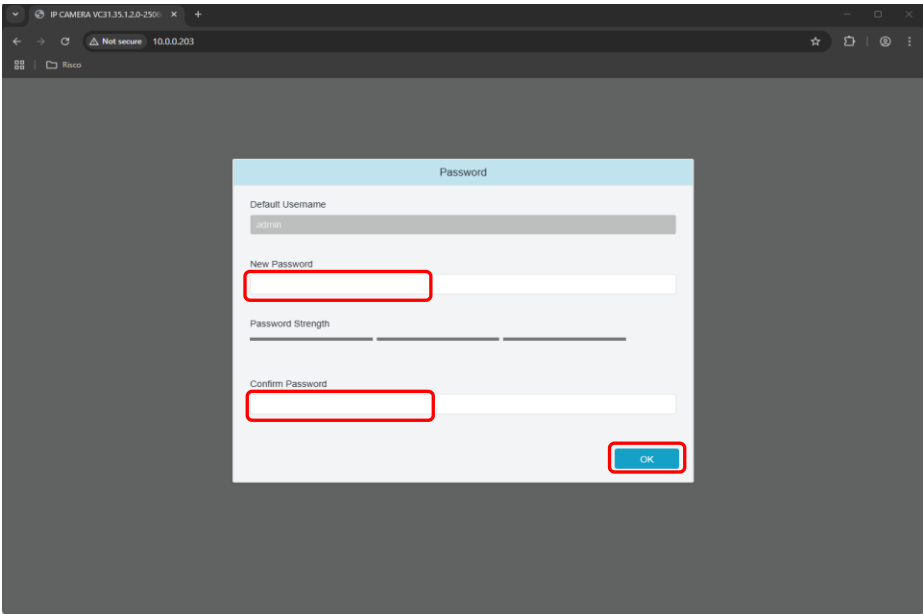

Step 4

⚙️ Click Remote Settings tab > Configure Camera parameters

💾 Click [Save](#) when done.

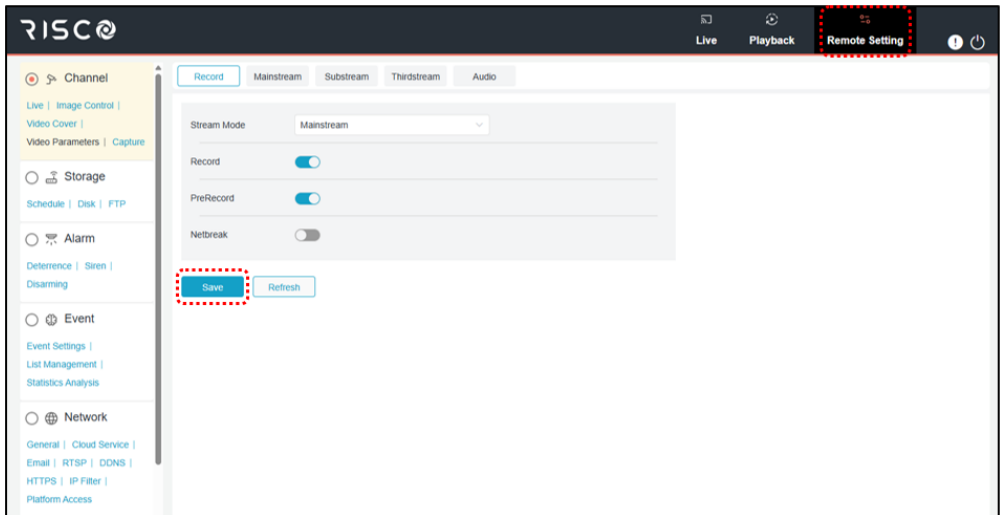

After the configuration is completed, you can add the device to the RISCO Cloud.

Repeat from Step 2 in the section **“Add Camera to RISCO Cloud first, then configure”**.

Lens Type	
Focal Length (Zoom Ratio)	2.8 mm
Max. Aperture Ratio	F No. 1.0
Angular Field of View	Horizontal:110°, Vertical:58°, Diagonal: 132°
Min. Object Distance	2m
Lens Type	Fixed(M12)
Video	
Imaging Device	1/2.7"
Effective Pixels	5MP 2880 (H)x1620(V)
Scanning System	Progressive CMOS
Min. Illumination	Color 0.002lux @ F1.0(AGC ON); B/W 0 lux @ IR ON
Operational	
IR LED	10pcs
WarmLight	6pcs
Red Blue Light	2pcs (1 Red&1 Blue)
IR Viewable Length	Up to 25m
WarmLight Viewable Length	Up to 15m
Type of complementary light	Default warm light, switchable infrared light
Motion Detection	Off/On (8 Level)
Wide Dynamic Range	WDR
Digital Noise Reduction	3D DNR
Image Setting	Full Color Mode/Day&Night Mode/Smart Illumination
White Balance	Auto/Manual
Electronic Shutter Speed	1/5 ~ 1/20000s
On-Board Storage	Micro SD slot, up to 256GB
Alarm	NA
Audio	Built-in microphone & Speaker
Custom Voice	Yes

Hardware Reset	Yes
Smart Feature	Face Detection, Pedestrian & Vehicle, License Plate, Line Crossing, Intrusion, Enter Region, Exit Region, Object Detection, Crossing Counting, Heat Map, Queue Length, Crowd Density, Rare Sound; Motion by SMD (Pedestrian&Vehicle) Video Tampering
Network	
Ethernet	RJ45(10/100BASE-T)
Video Compression Format	H.265/H.264
Resolution	Main Stream@30fps 5MP(2880x1620),4MP(2560X1440) 3MP(2304x1296),1080P(1920x1080) 720P(1280x720) Sub Stream@30fps 720P(1280x720),VGA(640x480),QVGA(320x240) Mobile Stream@30fps VGA(640x480), QVGA (320x240)
Video Quality Adjustment	256Kbps ~ 8Mbps
Bitrate control method	CBR/VBR
IP	IPv6
Protocol	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, SMTP, NTP, UPnP, SNMP, HTTPS, FTP
Security	IP address filter;complicated password;Authenticated username and password
Application Programming Interface	ONVIF(Profile S/G/T/M)
Web Viewer	IE10/11 Safari V12.1 above Firefox V.52 above Google chrome V.57 above Edge V.79 above
Environmental	
Operating Conditions	-35~+60°C/less than ≤ 90% RH
Ingress Protection	IP67

Electrical	
Input Voltage / Current	D12V/POE(IEEE802.3af)
Power Consumption	DC12V : max 6.3W ; POE (48V): max 7.6W
Mechanical	
Material	Metal
Dimensions (HxWxD)	Φ115x54mm

UKCA and CE EMC Compliance Statement

Hereby, RISCO Group declares that this equipment is in compliance with the essential requirements of the UKCA Electromagnetic Compatibility Regulations 2016 and CE Directive 2014/30/EU.

For the UKCA and CE Declaration of Conformity please refer to our website:

www.riscogroup.com

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation

Changes or modifications to this equipment which are not expressly approved by the party responsible for compliance (RISCO Group's.) could void the user's authority to operate the equipment.

FCC Note

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on to a different circuit from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Standard Limited Product Warranty (“Limited Warranty”)

RISCO Ltd. (“**RISCO**”) guarantee RISCO’s hardware products (“**Products**”) to be free from defects in materials and workmanship when used and stored under normal conditions and in accordance with the instructions for use supplied by RISCO, for a period of (i) 24 months from the date of delivery of the Product (the “**Warranty Period**”). This Limited Warranty covers the Product only within the country where the Product was originally purchased and only covers Products purchased as new.

Contact with customers only. This Limited Warranty is solely for the benefit of customers who purchased the Products directly from RISCO or from an authorized distributor of RISCO. RISCO does not warrant the Product to consumers and nothing in this Warranty obligates RISCO to accept Product returns directly from end users who purchased the Products for their own use from RISCO’s customer or from any installer of RISCO, or otherwise provide warranty or other services to any such end user directly. RISCO’s authorized distributor or installer shall handle all interactions with its end users in connection with this Limited Warranty. RISCO’s authorized distributor or installer shall make no warranties, representations, guarantees or statements to its end users or other third parties that suggest that RISCO has any warranty or service obligation to, or any contractual privity with, any recipient of a Product.

Remedies. In the event that a material defect in a Product is discovered and reported to RISCO during the Warranty Period, RISCO shall accept return of the defective Product in accordance with the below RMA procedure and, at its option, either (i) repair or have repaired the defective Product, or (ii) provide a replacement product to the customer.

Return Material Authorization. In the event that you need to return your Product for repair or replacement, RISCO will provide you with a Return Merchandise Authorization Number (RMA#) as well as return instructions. Do not return your Product without prior approval from RISCO. Any Product returned without a valid, unique RMA# will be refused and returned to the sender at the sender’s expense. The returned Product must be accompanied with a detailed description of the defect discovered (“**Defect Description**”) and must otherwise follow RISCO’s then-current RMA procedure published in RISCO’s website at www.riscogroup.com in connection with any such return. If RISCO determines in its reasonable discretion that any Product returned by customer conforms to the applicable warranty (“**Non-Defective Product**”), RISCO will notify the customer of such determination and will return the applicable Product to customer at customer’s expense. In addition, RISCO may propose and assess customer a charge for testing and examination of Non-Defective Product.

Entire Liability. The repair or replacement of Products in accordance with this Limited Warranty shall be RISCO’s entire liability and customer’s sole and exclusive remedy in case a material defect in a Product is discovered and reported as required herein. RISCO’s obligation and this Limited Warranty are contingent upon the full payment by customer for such Product and upon a proven weekly testing and examination of the Product functionality.

Limitations. This Limited Warranty is the only warranty made by RISCO with respect to the Products. The warranty is not transferable to any third party. To the maximum extent permitted by applicable law, this Limited Warranty shall not apply and will be void if: (i) the conditions set forth above are not met (including, but not limited to, full payment by customer for the Product and a proven weekly testing and examination of the Product functionality); (ii) if the Products or any part or component thereof: (a) have been subjected to improper operation or installation; (b) have been subject to neglect, abuse, willful damage, abnormal working conditions, failure to follow RISCO's instructions (whether oral or in writing); (c) have been misused, altered, modified or repaired without RISCO's written approval or combined with, or installed on products, or equipment of the customer or of any third party; (d) have been damaged by any factor beyond RISCO's reasonable control such as, but not limited to, power failure, electric power surges, or unsuitable third party components and the interaction of software therewith or (e) any failure or delay in the performance of the Product attributable to any means of communication provided by any third party service provider, including, but not limited to, GSM interruptions, lack of or internet outage and/or telephony failure. BATTERIES ARE EXPLICITLY EXCLUDED FROM THE WARRANTY AND RISCO SHALL NOT BE HELD RESPONSIBLE OR LIABLE IN RELATION THERETO, AND THE ONLY WARRANTY APPLICABLE THERETO, IF ANY, IS THE BATTERY MANUFACTURER'S WARRANTY. RISCO does not install or integrate the Product in the end user's security system and is therefore not responsible for and cannot guarantee the performance of the end user's security system which uses the Product or which the Product is a component of.

This Limited Warranty applies only to Products manufactured by or for RISCO. Further, this Limited Warranty does not apply to any software (including operating system) added to or provided with the Products or any third-party software, even if packaged or sold with the RISCO Product. Manufacturers, suppliers, or third parties other than RISCO may provide their own warranties, but RISCO, to the extent permitted by law and except as otherwise specifically set forth herein, provides its Products "AS IS". Software and applications distributed or made available by RISCO in conjunction with the Product (with or without the RISCO brand), including, but not limited to system software, as well as P2P services or any other service made available by RISCO in relation to the Product, are not covered under this Limited Warranty. Refer to the Terms of Service at: <https://riscocloud.com/ELAS/WebUI/UserLogin/License> for details of your rights and obligations with respect to the use of such applications, software or any service. RISCO does not represent that the Product may not be compromised or circumvented; that the Product will prevent any personal injury or property loss by burglary, robbery, fire or otherwise, or that the Product will in all cases provide adequate warning or protection. A properly installed and maintained alarm may only reduce the risk of a burglary, robbery or fire without warning, but it is not insurance or a guarantee that such will not occur or will not cause or lead to personal injury or property loss. CONSEQUENTLY, RISCO SHALL HAVE NO LIABILITY FOR ANY PERSONAL INJURY, PROPERTY DAMAGE OR OTHER LOSS BASED ON ANY CLAIM AT ALL INCLUDING A CLAIM THAT THE PRODUCT FAILED TO GIVE WARNING.

EXCEPT FOR THE WARRANTIES SET FORTH HEREIN, RISCO AND ITS LICENSORS HEREBY DISCLAIM ALL EXPRESS, IMPLIED OR STATUTORY, REPRESENTATIONS, WARRANTIES, GUARANTEES, AND CONDITIONS WITH REGARD TO THE PRODUCTS, INCLUDING BUT NOT LIMITED TO ANY REPRESENTATIONS, WARRANTIES, GUARANTEES, AND CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND WARRANTIES AGAINST HIDDEN OR LATENT DEFECTS, TO THE EXTENT PERMITTED BY LAW. WITHOUT LIMITING THE GENERALITY OF THE FOREGOING, RISCO AND ITS LICENSORS DO NOT REPRESENT OR WARRANT THAT: (i) THE OPERATION OR USE OF THE PRODUCT WILL BE TIMELY, SECURE, UNINTERRUPTED OR ERROR-FREE; (ii) THAT ANY FILES, CONTENT OR INFORMATION OF ANY KIND THAT MAY BE ACCESSED THROUGH THE PRODUCT SHALL REMAIN SECURED OR NON DAMAGED. CUSTOMER ACKNOWLEDGES THAT NEITHER RISCO NOR ITS LICENSORS CONTROL THE TRANSFER OF DATA OVER COMMUNICATIONS FACILITIES, INCLUDING THE INTERNET, GSM OR OTHER MEANS OF COMMUNICATIONS AND THAT RISCO'S PRODUCTS, MAY BE SUBJECT TO LIMITATIONS, DELAYS, AND OTHER PROBLEMS INHERENT IN THE USE OF SUCH MEANS OF COMMUNICATIONS. RISCO IS NOT RESPONSIBLE FOR ANY DELAYS, DELIVERY FAILURES, OR OTHER DAMAGE RESULTING FROM SUCH PROBLEMS. RISCO WARRANTS THAT ITS PRODUCTS DO NOT, TO THE BEST OF ITS KNOWLEDGE, INFRINGE UPON ANY PATENT, COPYRIGHT, TRADEMARK, TRADE SECRET OR OTHER INTELLECTUAL PROPERTY RIGHT IN ANY EVENT RISCO SHALL NOT BE LIABLE FOR ANY AMOUNTS REPRESENTING LOST REVENUES OR PROFITS, PUNITIVE DAMAGES, OR FOR ANY OTHER INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, EVEN IF THEY WERE FORESEEABLE OR RISCO HAS BEEN INFORMED OF THEIR POTENTIAL.

Contacting RISCO

RISCO Group is committed to customer service and Product support. You can contact us through our website (www.riscogroup.com) or at the following telephone and fax numbers:

United Kingdom

Tel: +44-(0)-161-655-5500
support-uk@riscogroup.com

Italy

Tel: +39-02-66590054
support-it@riscogroup.com

Spain

Tel: +34-91-490-2133
support-es@riscogroup.com

France

Tel: +33-164-73-28-50
support-fr@riscogroup.com

Belgium (Benelux)

Tel: +32-2522-7622
support-be@riscogroup.com

China

Tel: +86-755-82789285
support-cn@riscogroup.com

Israel

Tel: +972-3-963-7777
support@riscogroup.com

All rights reserved.

No part of this document may be reproduced in any form without prior written permission from the publisher.



© RISCO Group, 08/2025. All rights reserved.

5IN3122