
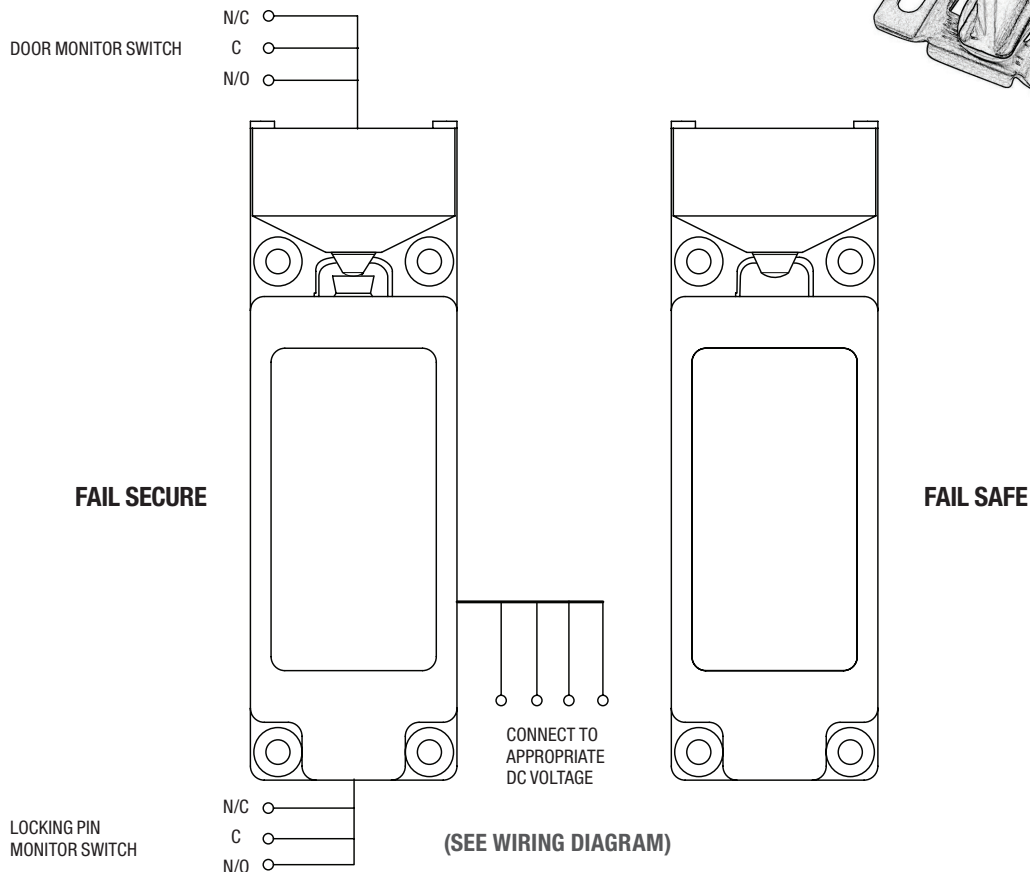


INSTRUCTIONS FOR LOCK MODE CHANGE:

1. Remove the 2 screws on the bottom.
2. Remove the base plate and solenoid.
3. Turn the assembly 180° and install into housing.


WARNING: CARE SHOULD BE TAKEN TO PREVENT DAMAGE TO SWITCH LEVER

4. Insert the two screws.

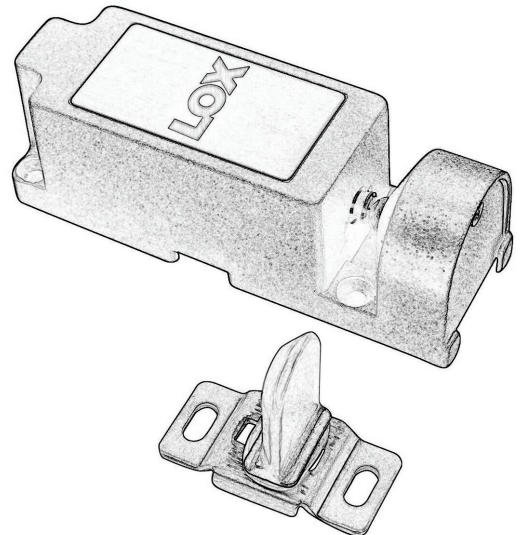


1. LOCKING PIN MONITOR SWITCH WIRING DIAGRAM

125VAC; 1A / 30VDC; 0.5A

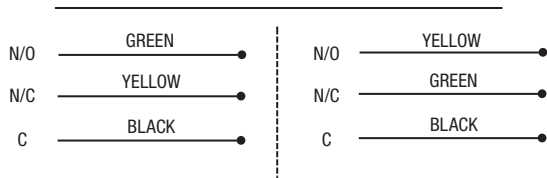


2. CABINET LOCK DUAL VOLTAGE WIRING DIAGRAM

12VDC (200mA)

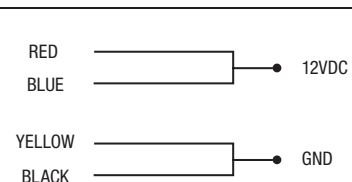


3. DOOR MONITOR SWITCH WIRING DIAGRAM

125VAC; 3A / 30VDC; 2A





4. CABINET LOCK DUAL VOLTAGE WIRING DIAGRAM


24VDC (100mA)

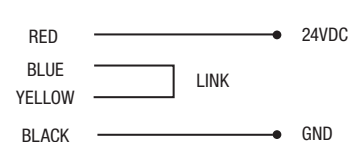


INSTALLATION DIMENSIONS

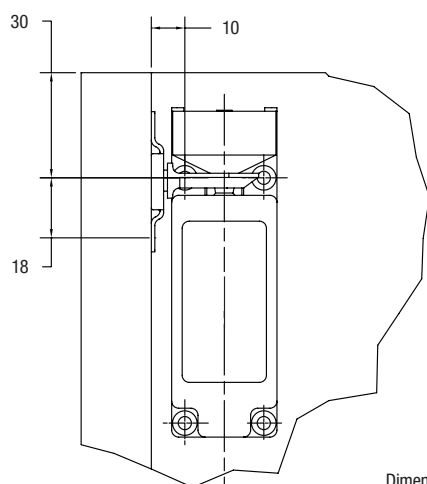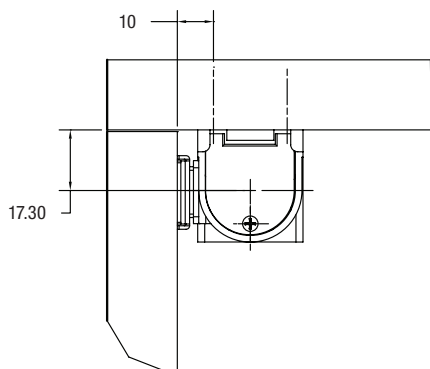

Dimensions (mm)

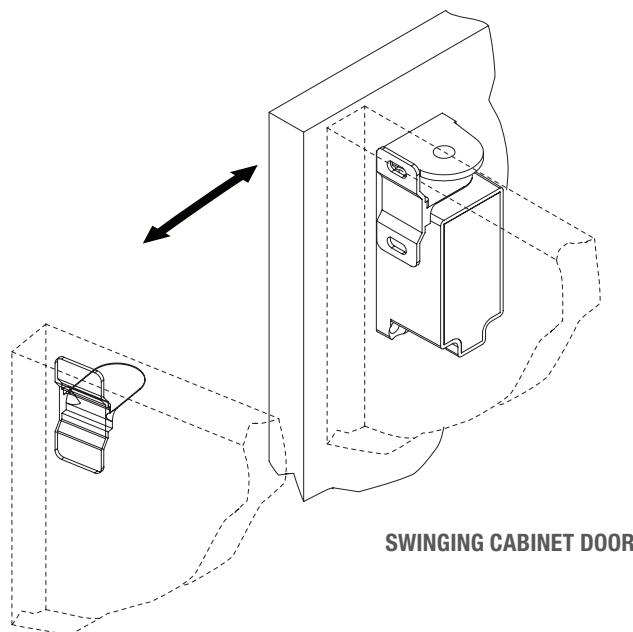




SWINGING CABINET DOOR

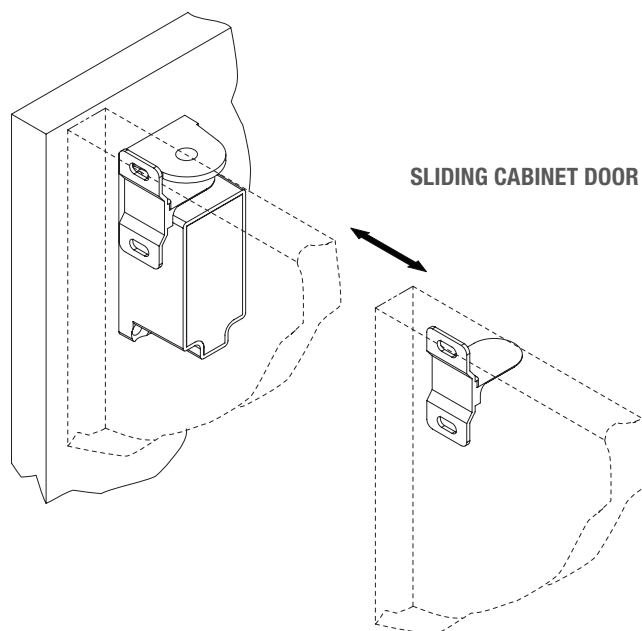

SLIDING CABINET DOOR

PARTS CHECK LIST

QTY	DESCRIPTION
4	FLAT HEAD WOOD SCREWS
2	PAN HEAD WOOD SCREWS

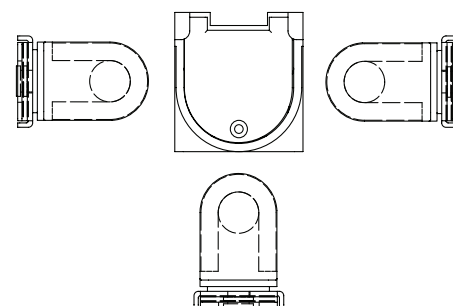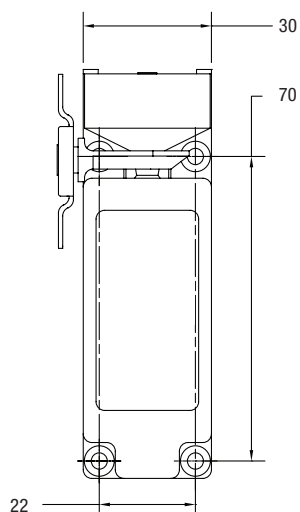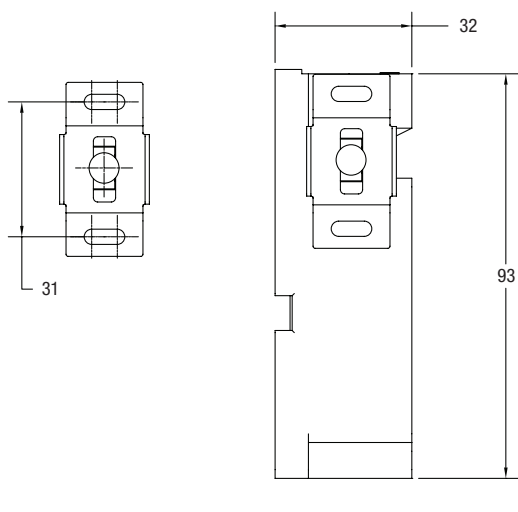

Dimensions (mm)