



3 Inside handle installation

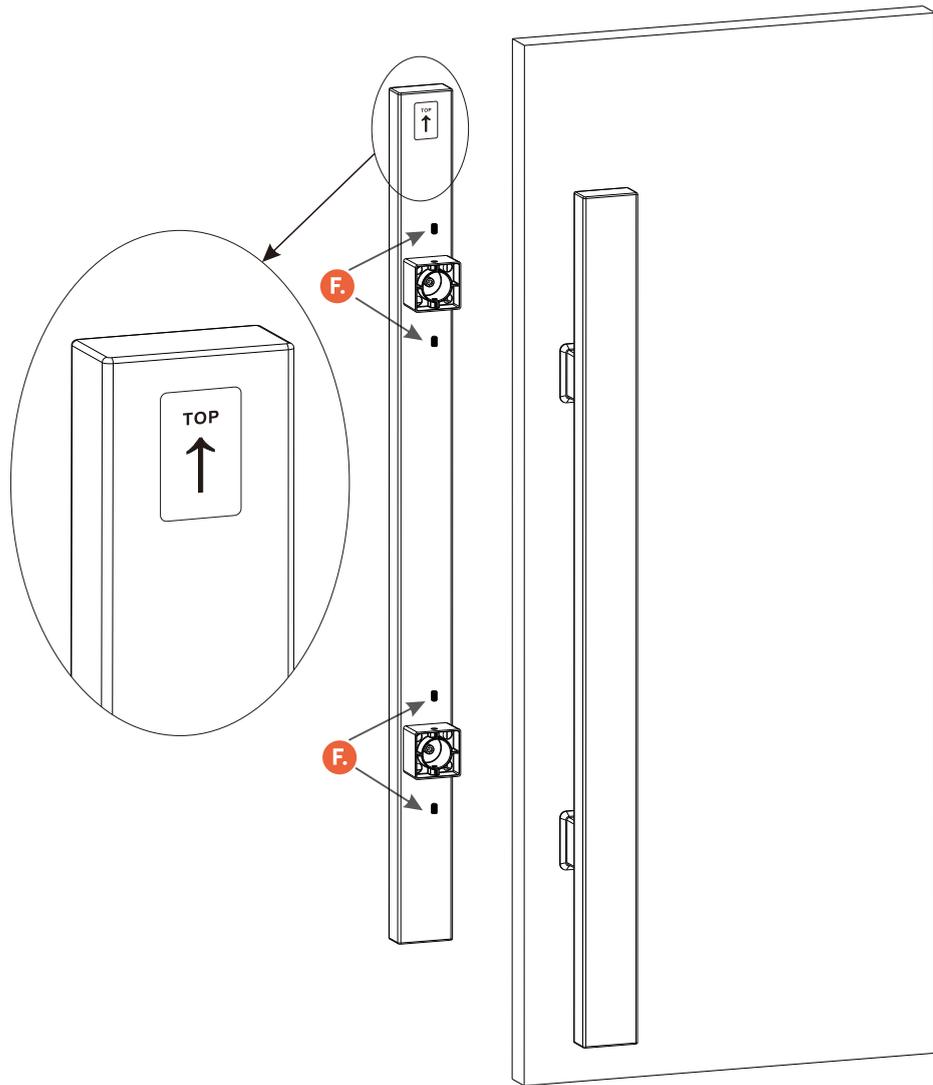

Fix the four screws (F) with the hex key tool provided.

Dummy Handle Installation Instructions

Exploded view diagram

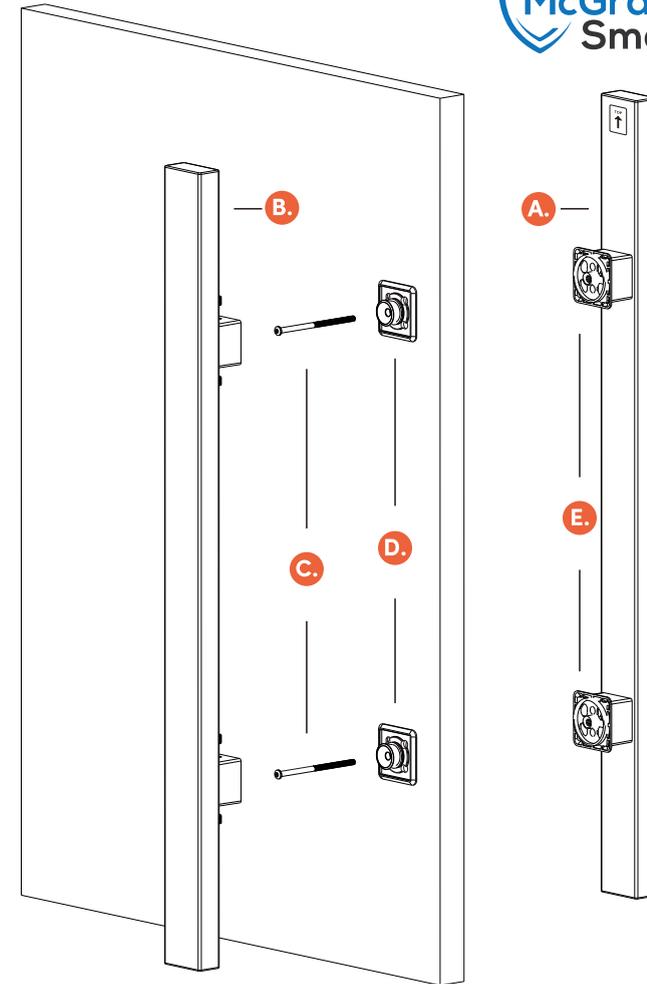

- A. Outside handle
- B. Inside handle
- C. Fixing screws

- D. Mounting plates
- E. Outside handle legs

1 Drill template




Tools Required:

1. Pencil
2. Measuring Tape
3. Power/battery drill
4. 54mm Holesaw
5. Phillips Head screwdriver
6. Hex key tool (provided)


Take the template provided, mark the drilling points on the door and drill the 2 door holes with a 54mm holesaw at the desired backset (60mm or 70mm).

Note:

1. Be careful to follow template measurements.
2. Door holes must be drilled horizontally.
3. Be sure the distances and alignments are the same as per Grange main lock.

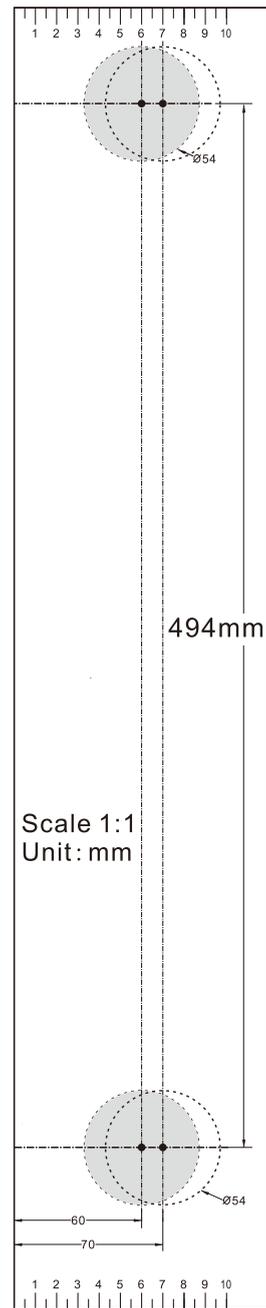

2 Outside handle installation

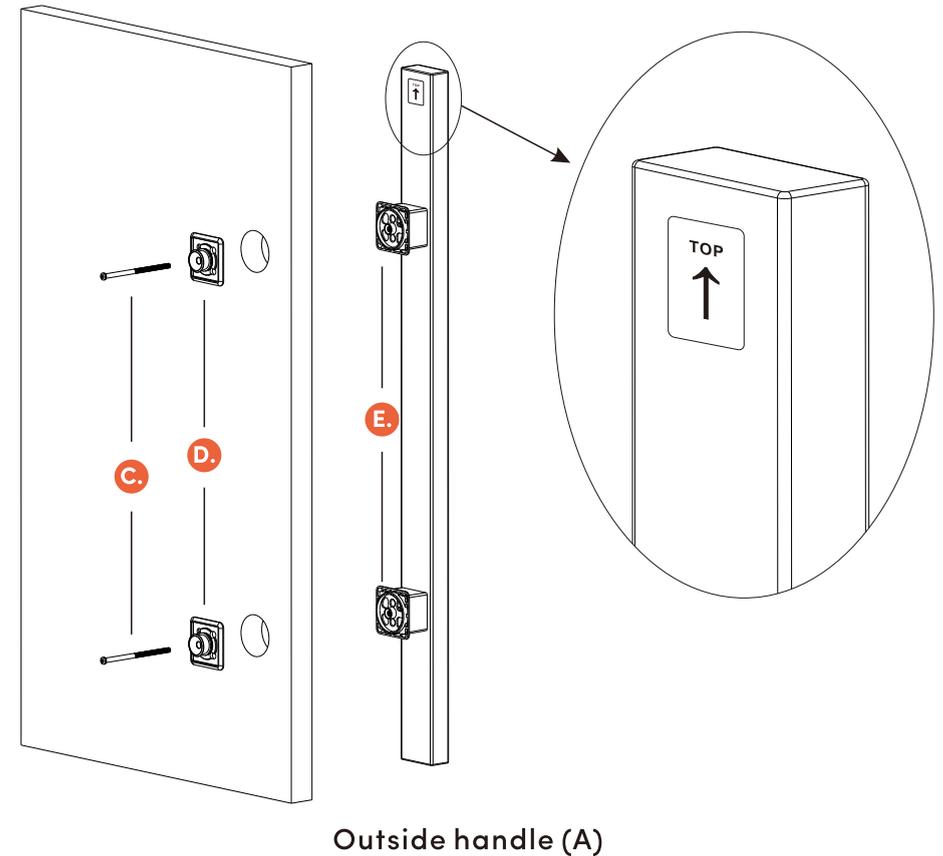

1. Pass the fixing screw (C) through the top mounting plate (D), then through the top door 54mm hole and finally through the top outside handle leg (E).
2. Screw the top fixing screw (C) to the outside handle using a Phillip head screwdriver. Don't over tighten the screw.
3. Repeat the same procedure for the bottom section.
4. Tighten top and bottom fixing screws.