

Ultra Series

Industrial Router

UR75

Milesight



Adopting high-performance industrial platform of quad-core CPU and cellular module, UR75 is capable of providing wire-speed network and ultra-small package to ensure the extremely safe and reliable connection to the wireless network. Upgraded to the latest cellular technology - 5G, the UR75 makes itself possible to enjoy ultra-fast broadband access with 5G cellular network.

Meanwhile, UR75 also supports 5-port Gigabit Ethernet switch, serial ports (RS232/RS485) and DI/DO (Digital input/Digital output), which enable you to scale up M2M application combining data and video in limited time and budget.

UR75 is particularly suitable for smart grid, digital media installations, industrial automation, telemetry equipment, medical device, digital factory, finance, payment device, environment protection, water conservancy and so on.

◆ Benefits

- Qualcomm quad-core CPU with big memory; SSD is available to support further development and customize requirements
- Global 5G (NSA/SA)/4G LTE network with dual SIM cards for backup between multiple carrier networks
- Gigabit Ethernet ports for lightning transmission of data
- Embedded Python SDK for secondary development
- Flexible modular design provides users with different connection modules like Ethernet, I/O, serial port, Wi-Fi, GPS for connecting diverse field assets
- Rugged enclosure, optimized for DIN rail or shelf mounting
- 3-year warranty included

◆ Security & Reliability

- Quickly develop functions with Function Compute and deploy them seamlessly to edge nodes
- Automated failover/failback between Ethernet, Cellular (dual SIM) and Wi-Fi
- Secure transmission with VPN tunnels like IPsec/OpenVPN/GRE/L2TP/PPTP/DMVPN
- Embeds hardware watchdog to automatically recover from various failure, ensure highest level of availability
- DeviceHub provides easy setup, mass configuration, and centralized management of remote devices


◆ Capabilities

- The device data can be aggregated and cleaned locally, and the processed data can be transmitted to the Cloud for storage and analysis.
- It can be continuously running in a broken or weak network environment, and the latest data can be synchronized to the Cloud after the network is restored
- Link remote devices in an environment where communication technologies are constantly changing
- Support 802.11 a/b/g/n/ac, as AP or client mode, to establish versatile wireless network or be the backup WAN link for 5G/4G
- Support rich protocols like SNMP, Modbus bridging, RIP, OSPF

◆ Easy Maintenance

- The user-friendly web interface design and more than one option of upgrade help administrator to manage the device as easy as pie
- WEB GUI and CLI enable the admin to achieve simple management and quick configuration among a large quantity of devices
- Efficiently manage the remote routers on the existing platform through the industrial standard SNMP

◆ Application Example

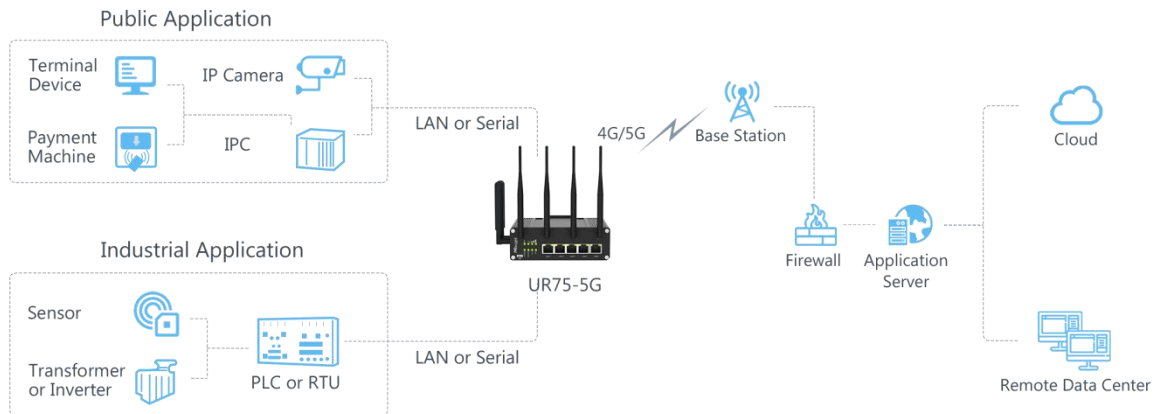

◆ Specifications

Hardware System

| | |
|--------------------|---|
| CPU | Qualcomm Quad-core ARM Cortex-A7, 716.8 MHz |
| Memory | 512 MB DDR3 RAM and 8GB Flash |
| Extendable Storage | 1 × M.2 NVMe SSD Interface |

Cellular Interface

| | |
|-----------|--|
| Antenna | UR75-5G: 4 × 50 Ω SMA Connectors (Center PIN: SMA Female) UR75-4G: 2 × 50 Ω SMA Connectors (Center PIN: SMA Female) |
| SIM Slots | 2 (Mini SIM-2FF) |

Ethernet Interface

| | |
|----------|---|
| Numbers | 5 × 10/100/1000 Mbps |
| Property | 1 × WAN +4 × LAN |
| Mode | Full or half duplex (Auto-Sensing) |
| PoE | 4 × 802.3 af/at PoE PSE on LAN Ports (Optional) |

Wi-Fi Interface

| | |
|----------------|---|
| Antenna | 2 × 50 Ω SMA Connectors (Center PIN: RP-SMA Female) |
| Standards | IEEE 802.11 b/g/n, 2.4 GHz IEEE 802.11 a/n/ac, 5 GHz |
| Tx Power | 2.4G: 26dBm(max) 5G: 26.4dBm(max) |
| Rx Sensitivity | |
| 2.4 GHz | 802.11b: ≤ -92dBm@11Mbps 802.11g: ≤ -78dBm@54Mbps |

802.11ac VHT20: $\leq -91\text{dBm@MCS0}$
 802.11ac VHT20: $\leq -66\text{dBm@MCS8}$
 802.11ac VHT40: $\leq -88.5\text{dBm@MCS0}$
 802.11ac VHT40: $\leq -64\text{dBm@MCS8}$

5 GHz

802.11a: $\leq -91\text{dBm@6Mbps}$
 802.11a: $\leq -76\text{dBm@54Mbps}$
 802.11ac VHT20: $\leq -90\text{dBm@MCS0}$
 802.11ac VHT20: $\leq -68\text{dBm@MCS8}$
 802.11ac VHT40: $\leq -87\text{dBm@MCS0}$
 802.11ac VHT40: $\leq -65\text{dBm@MCS9}$
 802.11ac VHT80: $\leq -84\text{dBm@MCS0}$
 802.11ac VHT80: $\leq -60\text{dBm@MCS9}$

| | |
|-------------------------|--|
| Modes | AP and Client mode |
| Security | WPA/WPA2 authentication, WEP/TKIP/AES encryption |
| GPS¹ | |
| Antenna | 1 × 50 Ω SMA Connector (Center PIN: SMA Female) |
| Technology | GPS/GLONASS/Beidou/Galileo/QZSS |
| Serial Interface | |
| Numbers | 1 × RS232 + 1 × RS485 (2 × RS485 Optional) |
| Connector | 3.5mm Terminal Block |
| Baud Rate | 300bps to 230400bps |
| DI/DO | |
| Numbers | 1 × DI (dry contact) + 1 × DO (wet contact), Galvanic Isolation |
| Connector | 3.5mm Terminal Block |
| Maximum V/A | 0.3A@30VDC (DO) |
| Others | |
| Reset Button | 1 × RESET |
| USB | 1 × USB 2.0 (Reserved) |
| LED Indicators | 1 × POWER, 1 × SYSTEM, 1 × VPN, 1 × WLAN, 1 × SIM, 3 × Signal strength |
| Built-in | Watchdog, Timer |
| Software | |
| Network Protocols | IPv4/IPv6, PPP, PPPoE, SNMP v1/v2c/v3, TCP, UDP, DHCP, RIPv1/v2, |

¹ For 5G version, GPS is under development; for 4G version, GPS is optional.

OSPF, DDNS, VRRP, HTTP, HTTPS, DNS, ARP, QOS, SNTP, Telnet, VLAN, SSH, etc.

| | |
|----------------------|--|
| VPN | DMVPN, IPsec, OpenVPN, PPTP, L2TP, GRE |
| Security | Access Control, DMZ, Port Mapping, MAC Binding, SPI Firewalls, DoS&DDoS Protection, Filtering(IP&Domain), IP Passthrough |
| Management | Web, CLI, SMS, On-demand dial up, SNMP v1/v2/v3, DeviceHub |
| AAA | Radius, Tacacs+, LDAP, Local Authentication |
| Multilevel Authority | Multiple Levels of User Authority |
| Reliability | VRRP, WAN Failover, Dual SIM Backup |
| Serial Port | Transparent(TCP Client/Server, UDP), Modbus Master/Slave, Modbus Gateway (Modbus RTU to Modbus TCP) |

Power Supply and Consumption

| | |
|-------------------|---|
| Power Connector | 2-pin 5.08 mm Terminal Block |
| Input Voltage | 9-48 VDC, with Surge-Protection and Reverse Polarity Protection |
| Power Consumption | ≤ 7.9W (In Non-PoE mode) |

Physical Characteristics

| | |
|--------------------|---|
| Ingress Protection | IP30 |
| Housing | Metal |
| Dimension | 135 x 118 x 45 mm (5.31 x 4.65 x 1.77 in) |
| Installation | Desktop, Wall or DIN Rail Mounting |

Environmental

| | |
|-----------------------|---|
| Operating Temperature | -40°C to +70°C (-40°F to +158°F) |
| Temperature | Reduced Cellular Performance Above 60°C |
| Storage Temperature | -40°C to +85°C (-40°F to +185°F) |
| Ethernet Isolation | 1.5 kV RMS |
| Relative Humidity | 0% to 95% (non-condensing) at 25°C/77°F |

Approvals

| | |
|------------|-----------|
| Regulatory | RoHS, CCC |
|------------|-----------|

◆ Dimensions(mm)

