SAFELOGIC WI-FI

SECURAM
RELIABLE · INNOVATIVE · TRUSTED

UL LISTED

Smart Connectivity with Remote Control and Multi-User Management

Upgrade your safe with SECURAM's SafeLogic Wi-Fi – a smart retrofit solution combining robust security with intelligent control. Designed for residential and commercial users who demand confidence and convenience, this system offers remote access, user management, and one-time codes – all accessible through the SECURAM Guard app.

Download on the App Store · ANDROID APP ON Google play

Features

- **Smart Wi-Fi Connectivity:** Control and monitor your safe from anywhere using the SECURAM Guard app (iOS & Android)
- **Plug-and-Play Retrofit:** Easily replace your existing SafeLogic EntryPad for an instant smart upgrade
- **User Codes in Analog Mode:** 1 Manager / 1 User Code
- **User Codes in Digital Mode:** 1 Manager Code / 9 User Codes
- **Advanced Code Management:** Add/delete multiple user codes in Digital Mode
- **One-Time Use Codes:** Provide guests or service providers with secure, temporary access
- **Remote Unlock:** Unlock your safe remotely once paired securely with your smartphone
- **Automatic Re-Lock:** Lock re-engages after 6 seconds to ensure valuables remain protected
- **Penalty Lockout:** Prevents code guessing with auto-lockout after multiple invalid attempts
- **Low Battery Alerts:** Audible warnings ensure uninterrupted protection
- **Reset Function:** Restore all codes to factory default if needed
- **Standby Status:** EntryPad enters standby after 10 seconds of inactivity to conserve battery

Lock Body Compatibility

Ensure your safe is compatible before upgrading.
- **Supports SECURAM Lock Bodies only**
    - **EL-0601** (after July 2018)
    - **EL-0601-1M-2U** (after July 2018)
    - **EL-0601-BM** (after July 2018)
    - **EL-0601-S** (after July 2018)

- **Three Installation Options**
    - **Option 1:** Replace EntryPad only (no reset needed, retains current users)
    - **Option 2:** Replace EntryPad only + reset system (enables up to 10 users)
    - **Option 3:** Replace EntryPad and Lock Body (includes new Lock Body for universal installation)

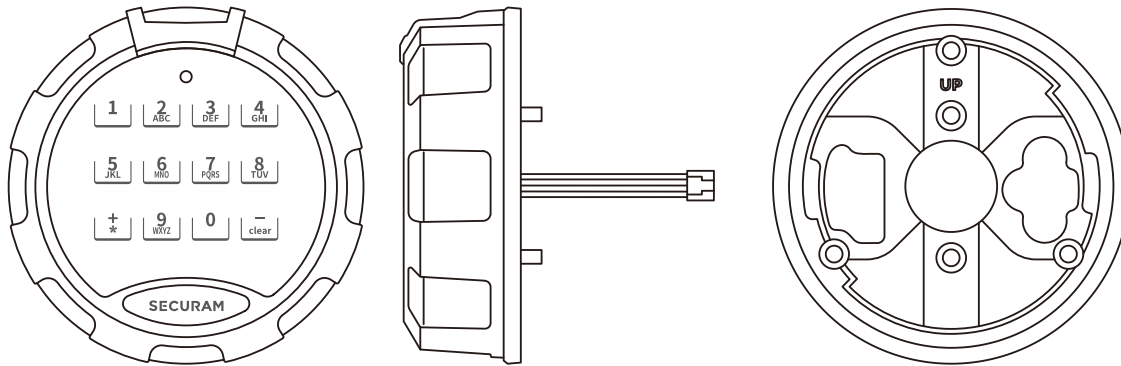Note: Lock bodies from other brands are not compatible.

Specifications

- **Part #:** EC-W2301A-MB
- **Code Length:** 6 digits
- **Power Supply:** one 9V Alkaline Battery
- **Battery Life:** Approximately 1 year
- **Wi-Fi Compatibility:** Requires 2.4GHz Wi-Fi network
- **Certifications:** FCC, UL
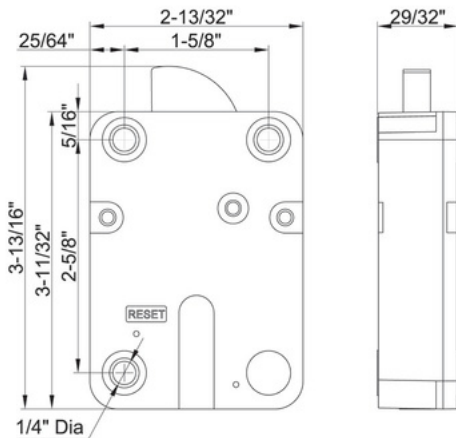- **Finish Available:** Matte Black

SAFELOGIC WI-FI

Technical Specifications

SAFELOGIC WI-FI SAFE LOCK #EC-W2301A-MB

SwingBolt – Part # EL-0601-S

Specifications			
Code Length	Six(6) - digit	**Rated Voltage**	DC 9V
Wi-Fi Compatibility	Requires 2.4GHz Wi-Fi network	**Operating Temperature**	32°F to 113°F
Power Supply	9V Alkaline Battery	**Operating Humidity**	<90% RH