

1078-N

Recessed magnetic contact for steel doors, white

Steel door applications

The Sentrol 1078(C/T) series steel door contacts are designed specifically for use in the steel doors commonly found in commercial building applications. Many models including, wide gap, SPDT and biased for high security applications make the 1078 series the most widely used and comprehensive line available.

Easy Installation

The unique housing design features a rugged body construction with flexible ribbed sides for quick, secure installation without gluing. The magnet housing isolates the magnet from the surrounding steel for maximum gap distances, both make and break.

Durability and dependability

The Sentrol high performance magnetic contacts have been designed to facilitate installation and ensure durability and dependability. Most are conservatively rated at 10,000,000 cycles, guaranteeing a long life. Every reed connection is hand soldered and each magnetic contact is tested before they leave the factory, 100% of the time.

High quality components and materials

Reed legs are plated with rhodium or ruthenium, and hermetically sealed in dry nitrogen. This offers superior protection against sticking and provides a moisture free environment therefore preventing corrosion.



Details

- Special design for steel mounting
- Self-lock mounting
- Rugged construction
- Comprehensive product range

1078-N

Recessed magnetic contact for steel doors, white

Technical specifications

General


Application type	Recessed mount
Contact type	NC
Connectivity	30 cm wire leads

Wired / wireless

Wired-wireless	Wired
Operating gap	13 mm (max.)

Physical

Dimensions magnet	25 x 40 mm (Ø x L)
Dimensions contact / sensor	25 x 29 mm (Ø x L)
Colour	White

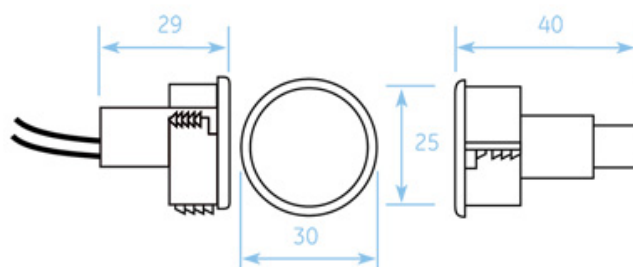

As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 5 May 2023 - 9:53